



The Ultimate Mid-Size **Luxury** Scooter

VICTORY® 10
LX WITH CTS SUSPENSION

4-Wheel Scooter



Front Suspension

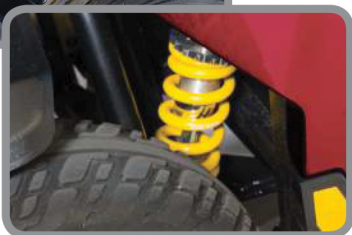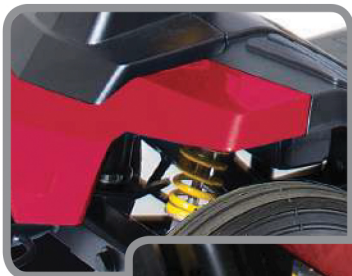

Rear Suspension

The **Victory® 10 LX** with CTS Suspension Mobility Scooter features CTS (Comfort-Trac Suspension) Suspension and brings a new level of performance and features to mid-size scooters. Featuring CTS front and rear suspension, sleek style, feather-touch disassembly and standard lighting, the 4-wheel Victory 10 LX with CTS Suspension is the ultimate mid-size luxury scooter.

Specifications

Weight Capacity	181.4 kg (400 lbs.)
Maximum Speed ¹	Up to 9 km/h (5.6 mph)
Ground Clearance ²	5.6 cm (2.2")
Turning Radius ²	152.1 cm (59.9")
Overall Length ²	119.4 cm (47")
Overall Width ²	56.5 cm (22.2")
Front Tyres ²	9 cm x 25.4 cm (3.5" x 10") pneumatic
Rear Tyres ²	9 cm x 25.4 cm (3.5" x 10") pneumatic
Suspension:	Front and Rear
Range Per Charge ^{1,4}	Up to 26 km (16.16 miles)
Total Weight Without Batteries	70.9 kg (156.2 lbs.)
Heaviest Piece When Disassembled	35.2 kg (77.6 lbs.) front section
Standard Seating	<i>Type:</i> Anscon Junior seat <i>Weight:</i> 19 kg (42 lbs.) <i>Material:</i> Black Vinyl <i>Dimensions:</i> Width: 43.16 cm (17") Depth: 43.16 cm (17")
Motor Output	24-volt DC motor, sealed mini-transaxle
Brakes	Regenerative and electromechanical
Battery Requirements ⁵	(2) 12V deep-cycle Size: 40AH (standard) Weight ³ 40 AH: 19.7 kg (21.4 lbs.) each
Battery Charger	Off-board, 5-amp
Colour	Candy Apple Red



Features

- CTS Suspension (Comfort-Trac front and rear suspension)
- Sleek, modern design
- Exclusive black, non-scutting tyres
- Feather-touch disassembly permits simple frame separation with only one hand
- Modular design for easy serviceability
- Delta tiller with wraparound handles
- Easily accessible charger port in tiller
- Full LED lighting package that includes curb and rear lights and directional signals
- Courtesy light under tiller
- Storage compartment below tiller
- Enhanced flush-mounted horn buttons
- Auto-connecting front-to-rear cable

Options

- Pride[®] rear bag (includes crutch/walking stick holder)
- Walker holder (must have Pride[®] rear bag to attach)
- Oxygen tank holder (must have Pride[®] rear bag to attach)
- Saddlebag
- Mobile phone holder
- Cup holder
- Flag

¹ Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition and tyre condition. These specifications can be subject to a variance of (+/- 10%).
² Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or - 3%).
³ AGM or gel cell type required.
⁴ Tested in accordance with ANSI/RESNA, WC Vol2, section 4 & ISO 7176-4 standards. Results derived from theoretical calculations based on battery specifications and drive system performance. Test conducted at maximum weight capacity.
⁵ Battery weight may vary based on manufacturer.

NOTE: All specifications subject to change without notice.

The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tyre pressure.

Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressure, ambient temperature, and the gradient and surface of the road or pavement.